



Sidike Paheding  
Advisor: Dr. Vijayan Asari

## Rotation, Scaling and Illumination Invariant Pattern Recognition Using Joint Transform Correlator for Object Detection and Tracking

### Introduction

The joint transform correlator (JTC) based techniques such as Fringe-adjusted JTC (FJTC) can be efficiently used for real-time optical pattern recognition and tracking applications. The main advantage of JTC is that it does not require a priori fabrication of a complex filter. However, JTC is sensitive to rotation, scale and illumination changes of objects that presented in input scenes.

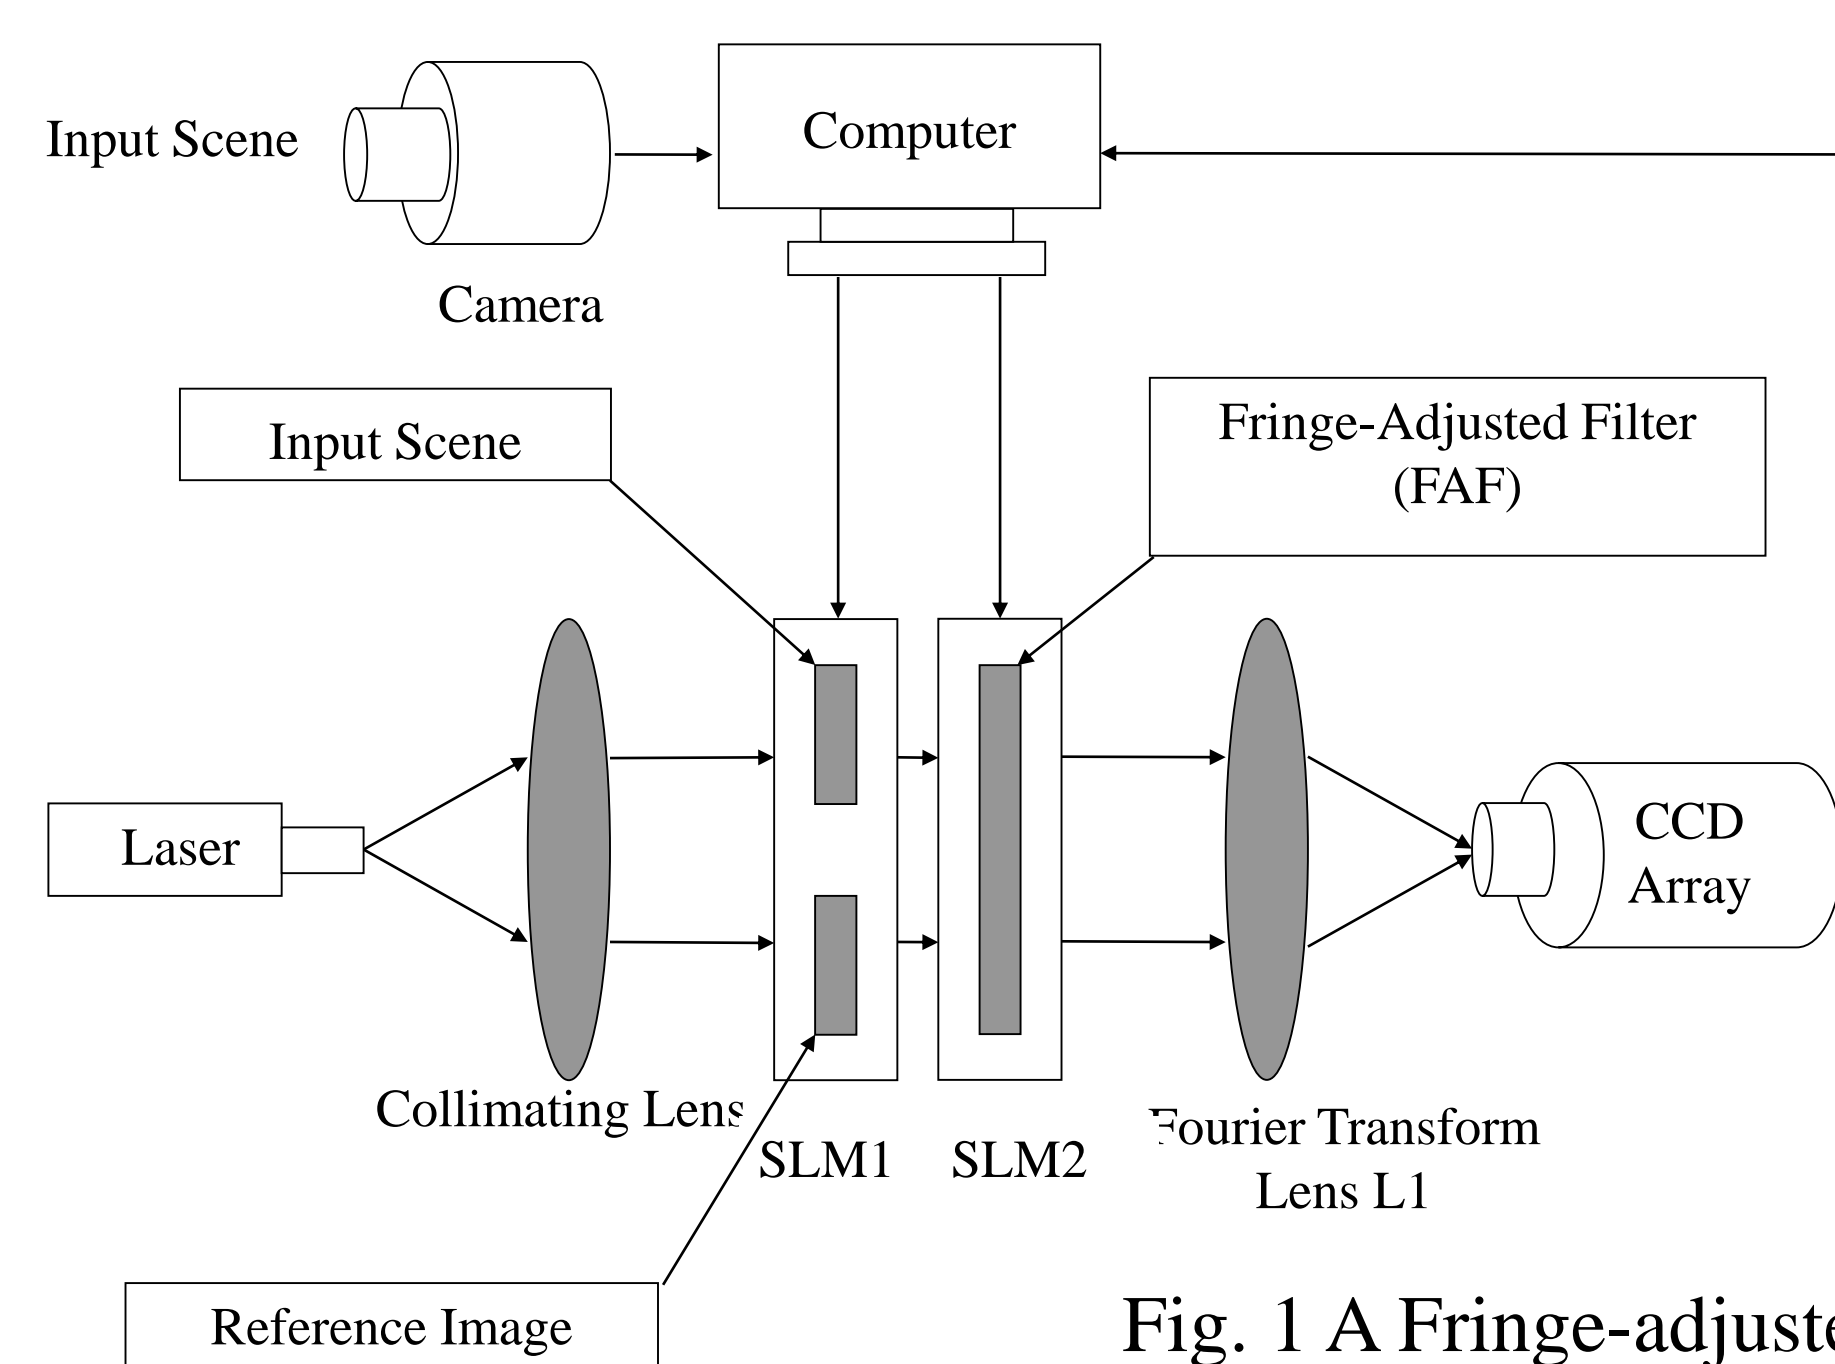


Fig. 1 A Fringe-adjusted JTC architecture.

### Motivation

Objects in an input scene could be mainly distorted by three factors:

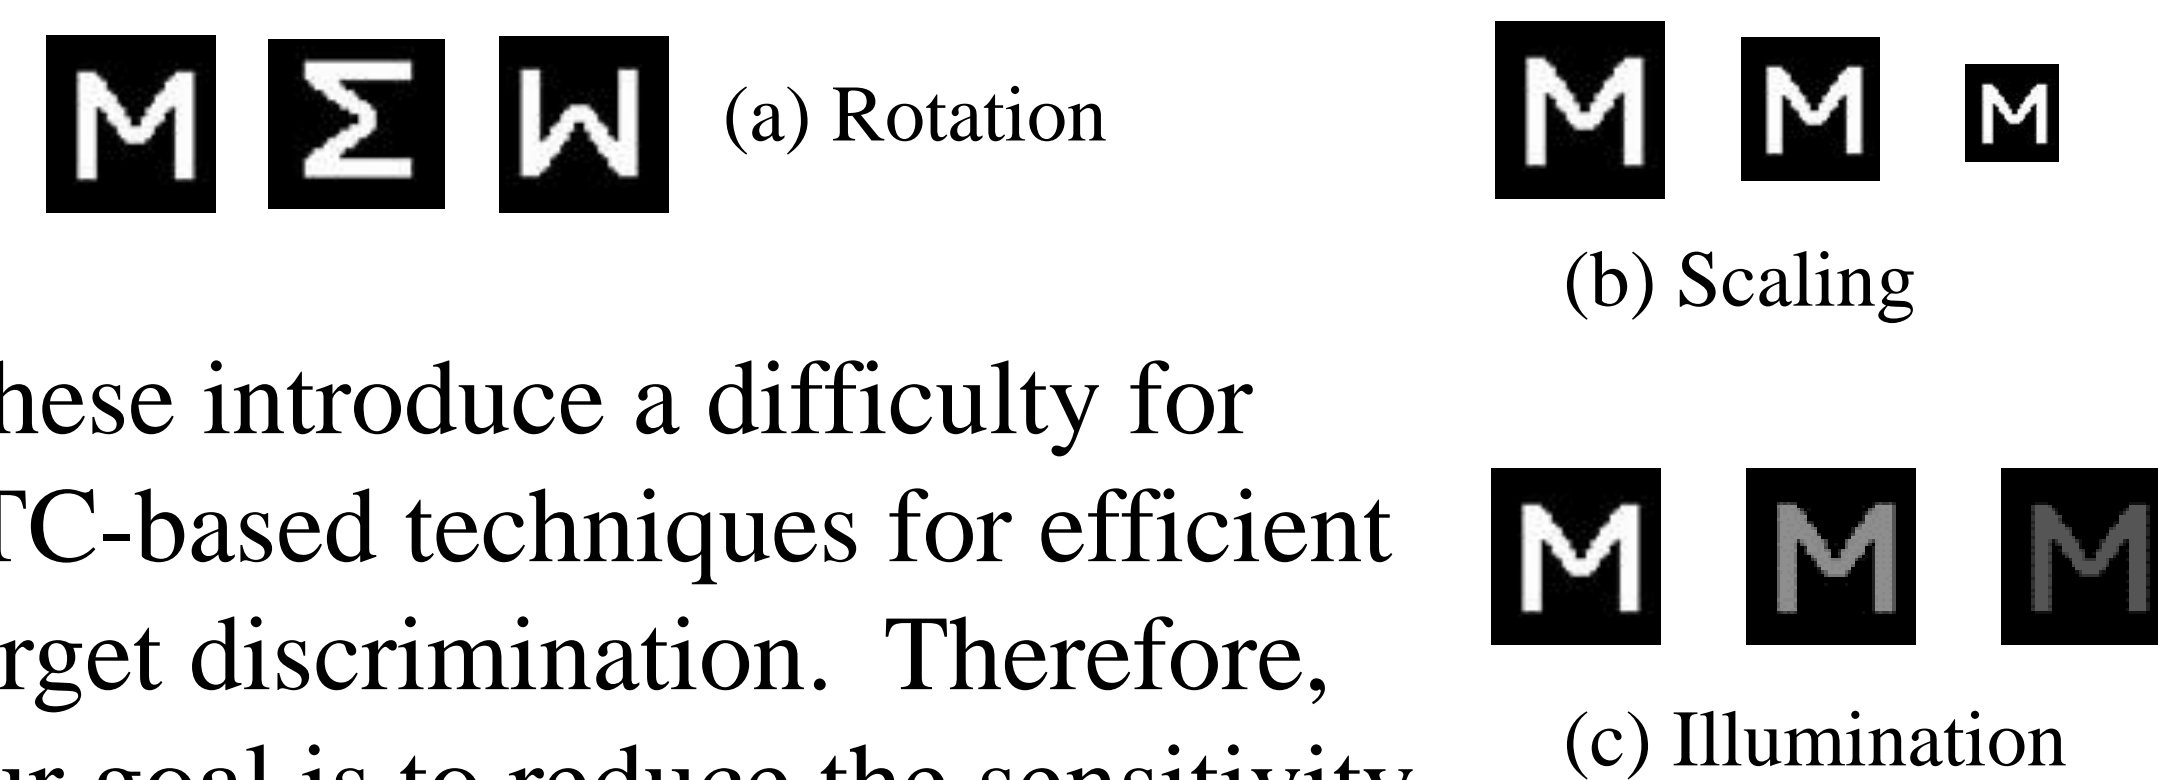


Fig. 2 Distortion Factors.

These introduce a difficulty for JTC-based techniques for efficient target discrimination. Therefore, our goal is to reduce the sensitivity to target distortion such as rotation, scaling and illumination, so that improve the detection efficiency of JTC in terms of sharper correlation peak intensity, narrow correlation width and higher pattern discriminability.

### Methodology

Our proposed scheme contains two components: Local Phase (LP) and Synthetic Discriminant Function (SDF).

#### Local Phase

Monogenic signal:  $f_M(x) = f(x) - (i, j)f_R(x)$ , where  $f_R(x) = \frac{x}{2\pi|x|^3} * f(x)$

Local phase (LP):  $\varphi(x) = \arg(f_M(x))$

#### Synthetic Discriminant Function

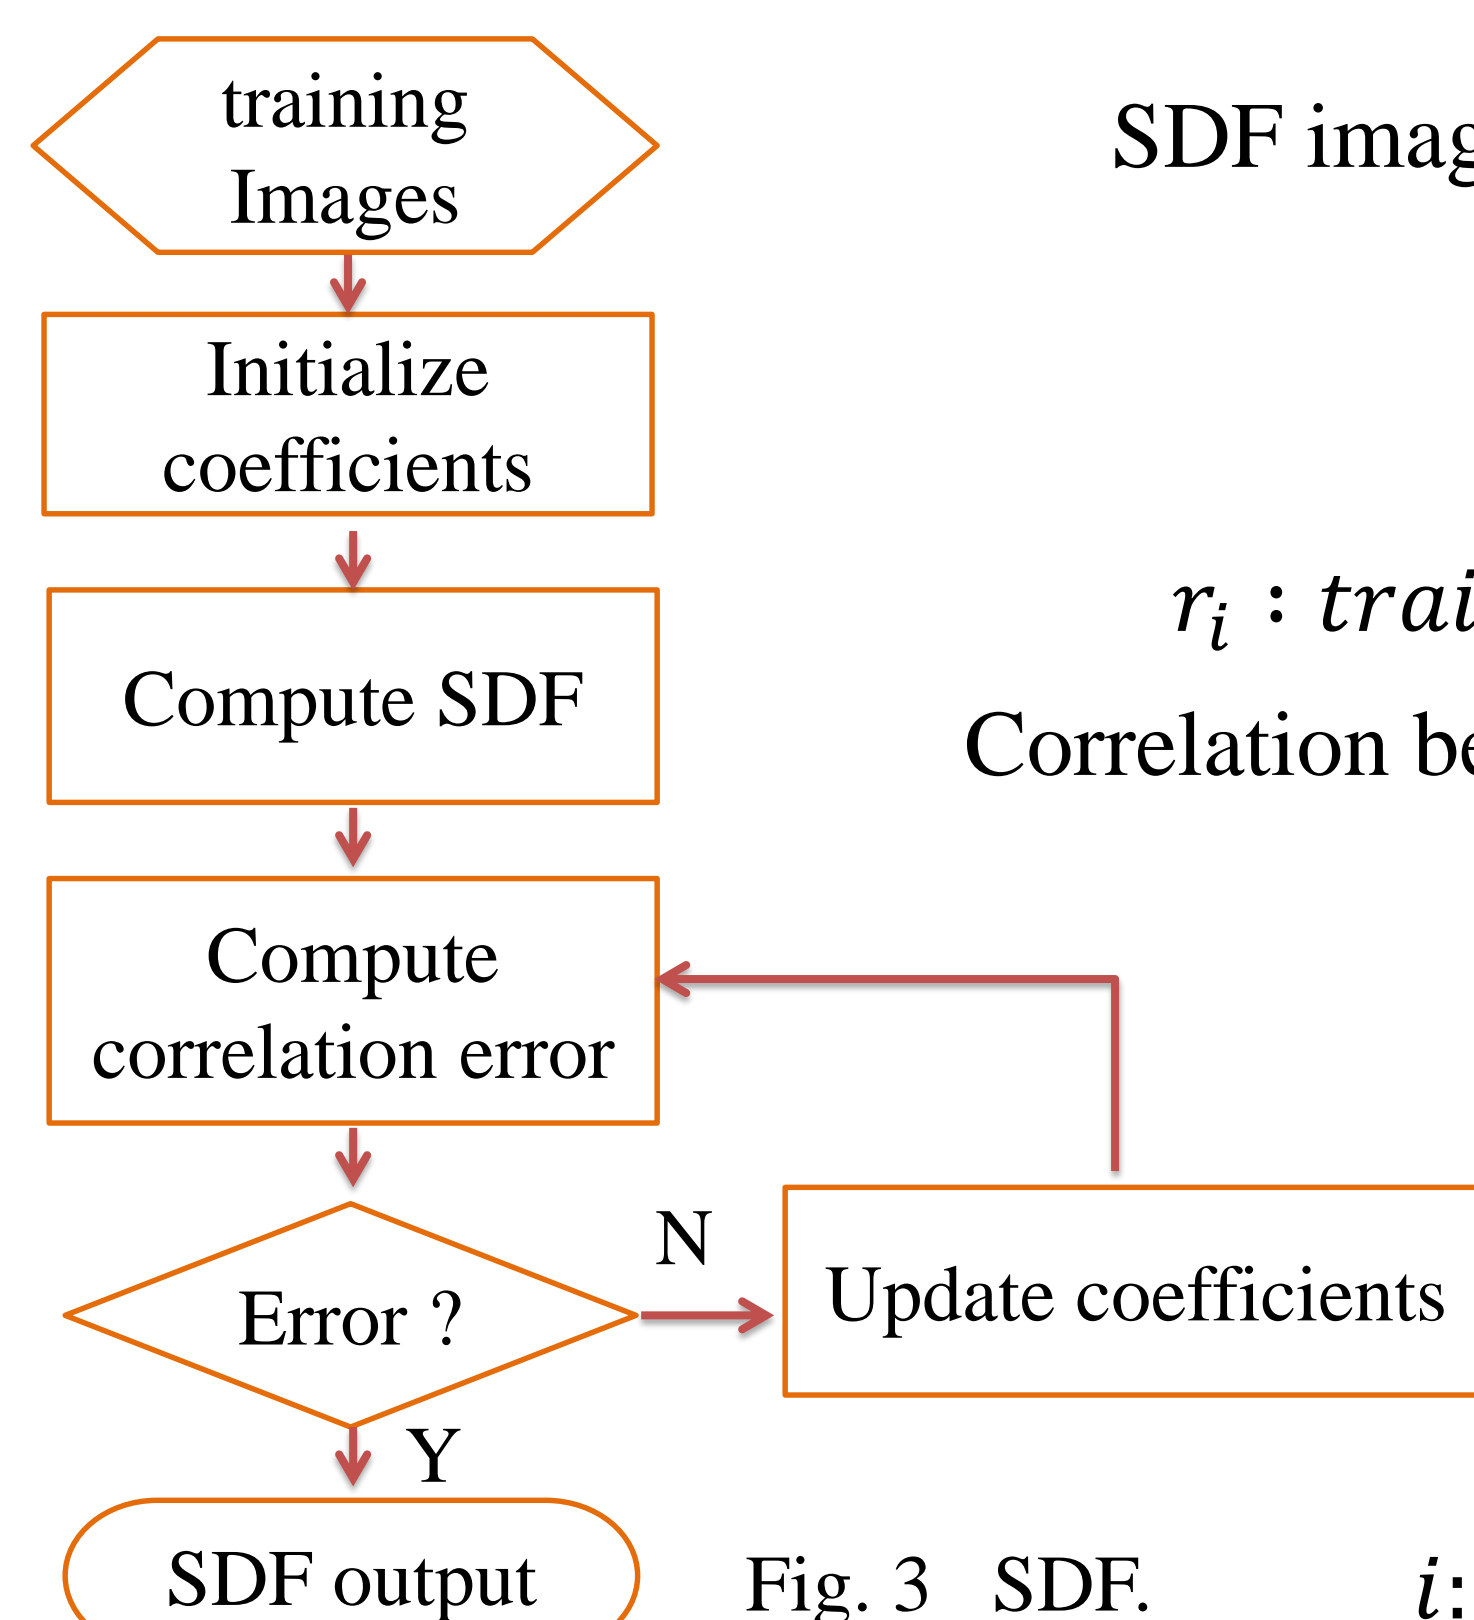


Fig. 3 SDF.

SDF image is formed from training images:

$$SDF = \sum_{k=0}^n a_i r_i(x, y)$$

$r_i$  : training images,  $a_i$  : coefficients

Correlation between SDF and each training images:

$$corr_i = SDF \otimes r_i(x, y)$$

$$Error: err = \frac{corr_{max} - corr_{min}}{corr_{max}}$$

Updated coefficients:

$$a_i = a_i + (corr_{max} - corr_{min}) \times \delta$$

$i$ : iteration number,  $\delta$ : relaxation factor

### Test Results on Tracking

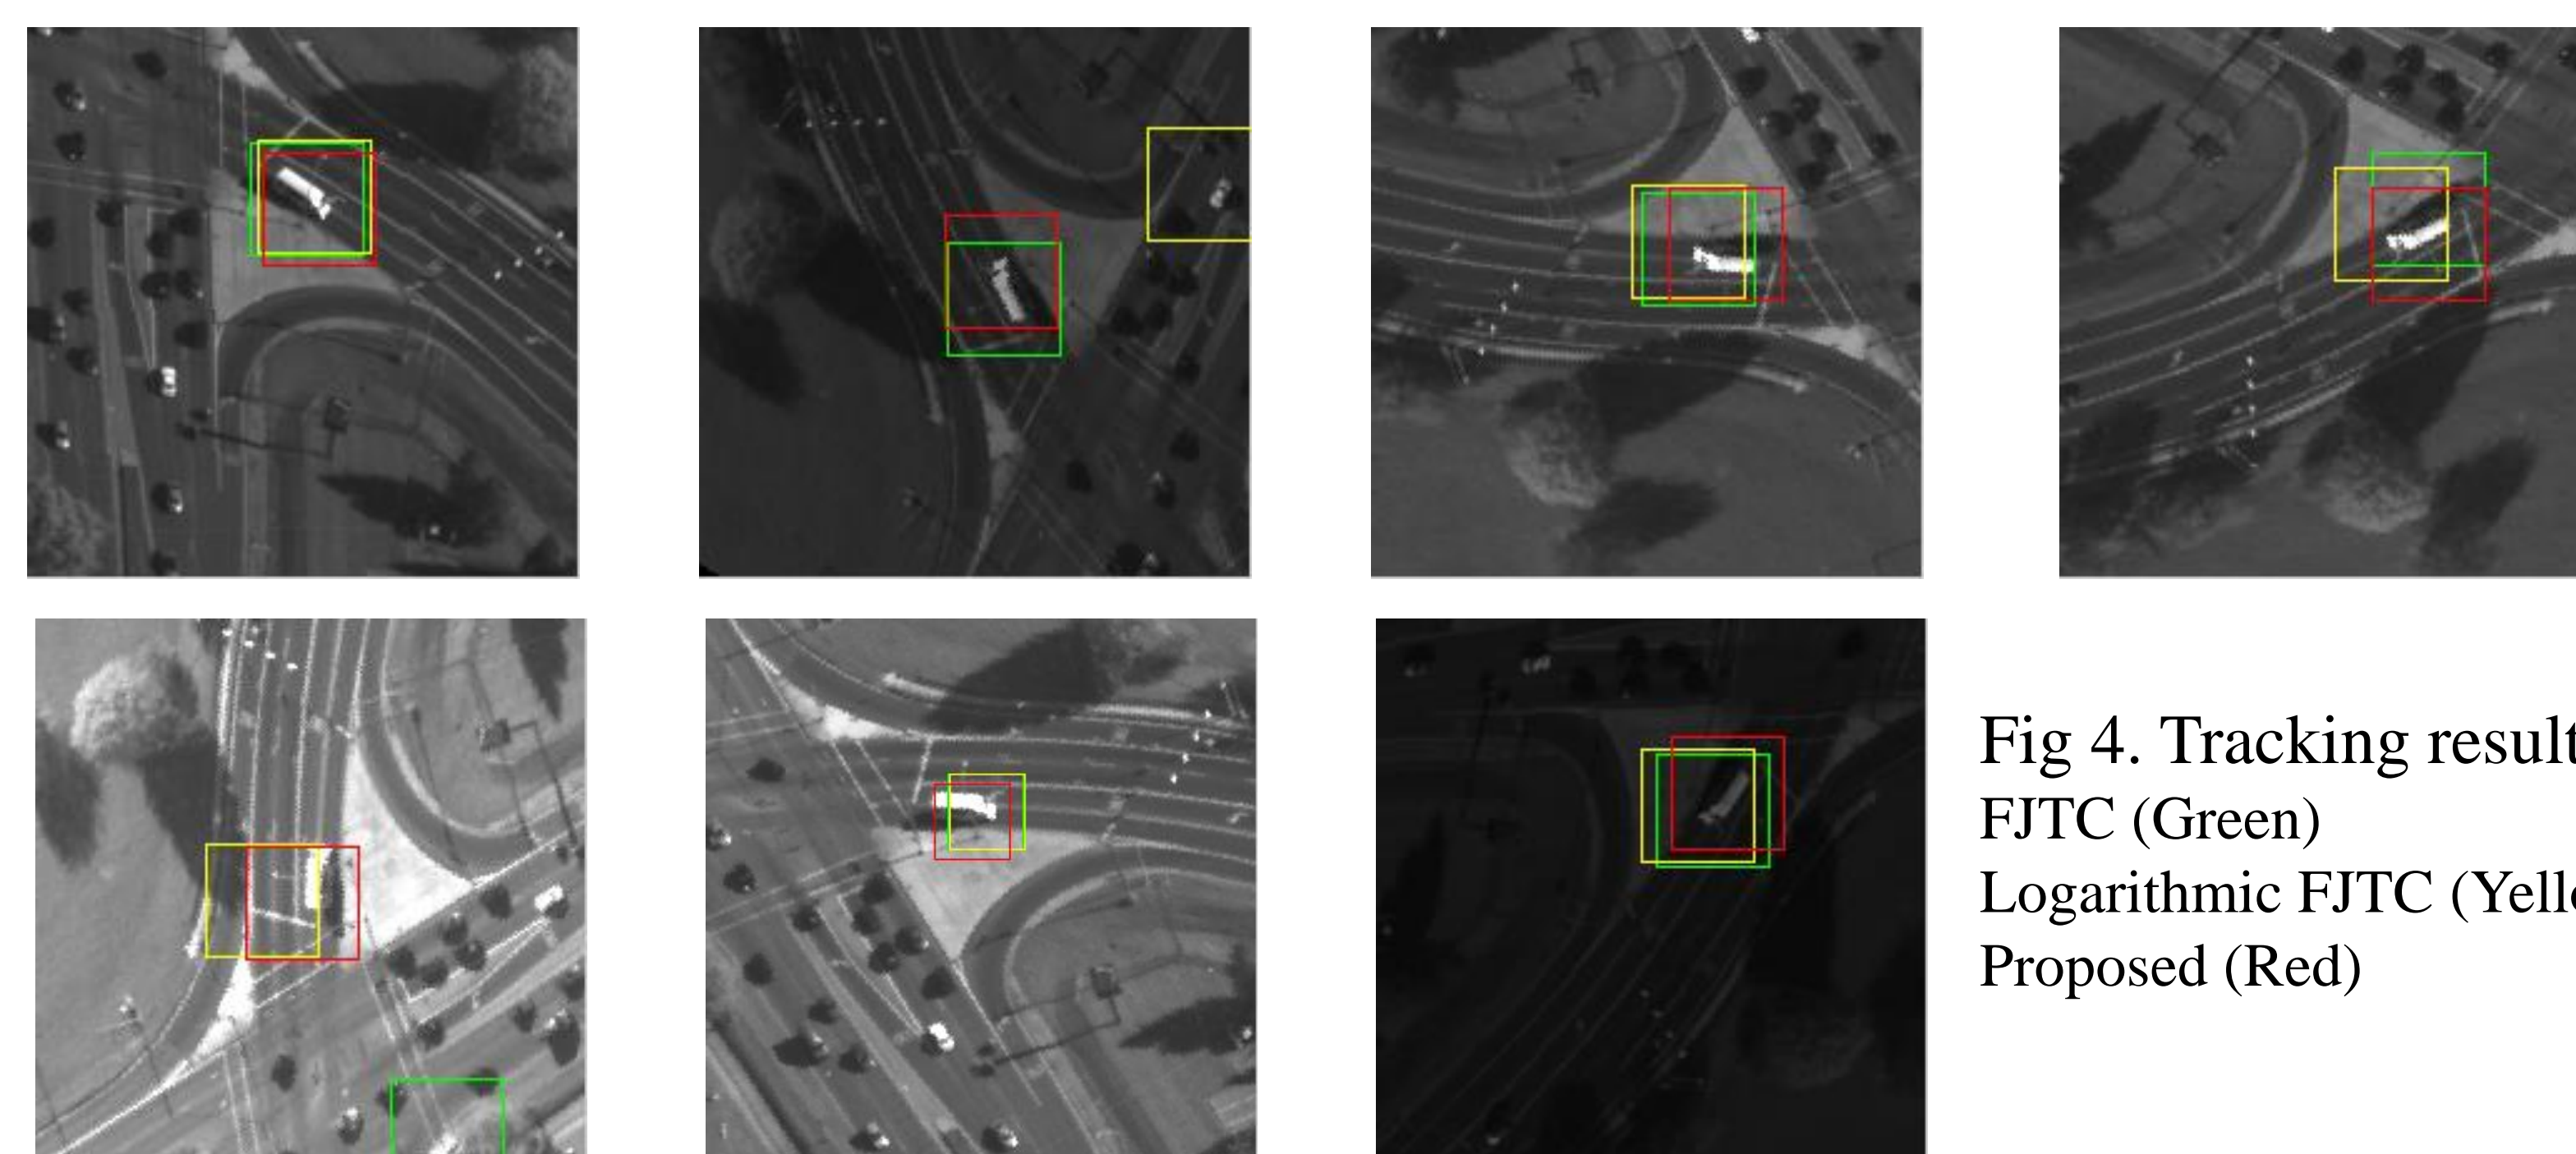


Fig. 4. Tracking results.  
FJTC (Green)  
Logarithmic FJTC (Yellow)  
Proposed (Red)

### Test Results on Object Detection

#### Rotation & Scaling



Fig. 5 Training set to generate SDF




Fig. 6 SDF composite image.


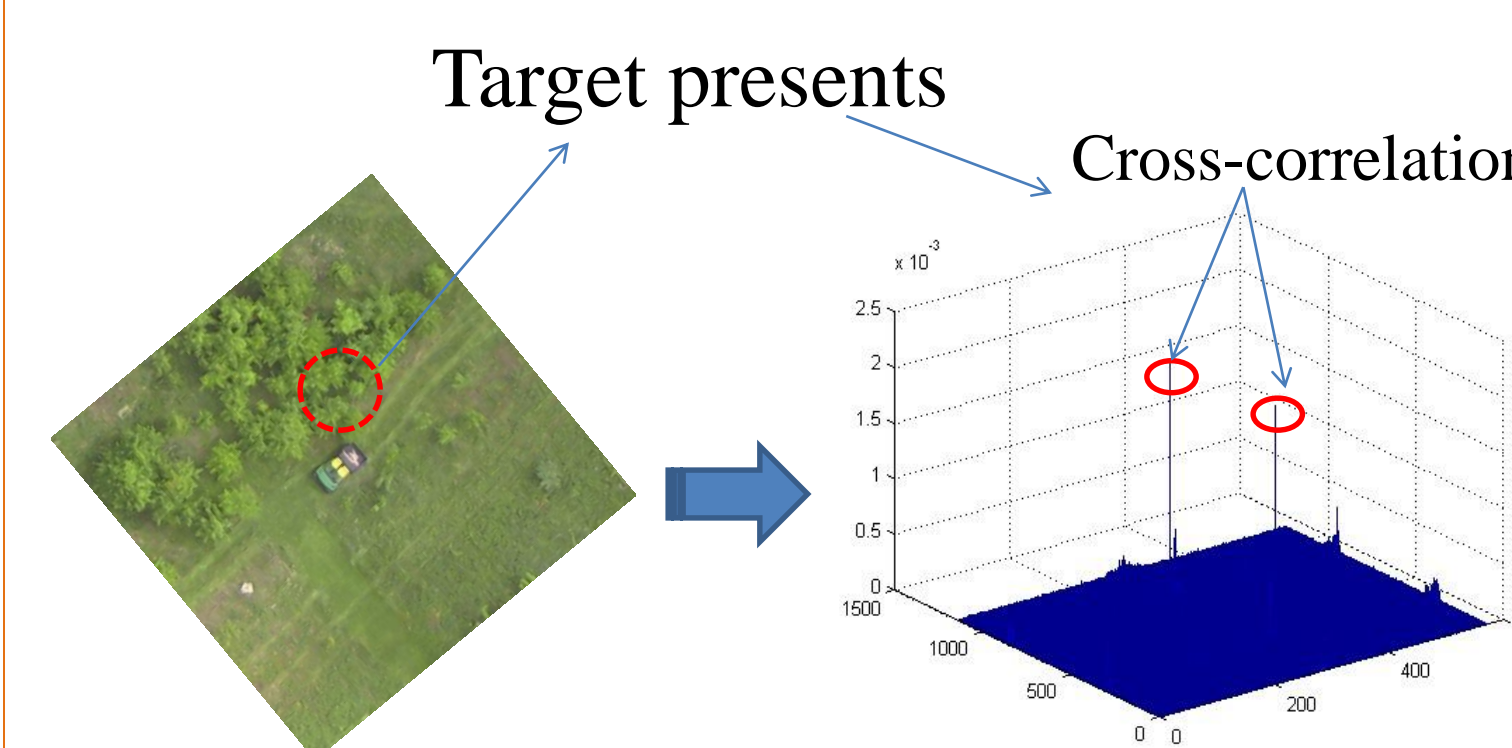


Fig. 7 (a) Test image, (b) 3D correlation.



Fig. 8 Detection Results in different scaling.

#### Illumination

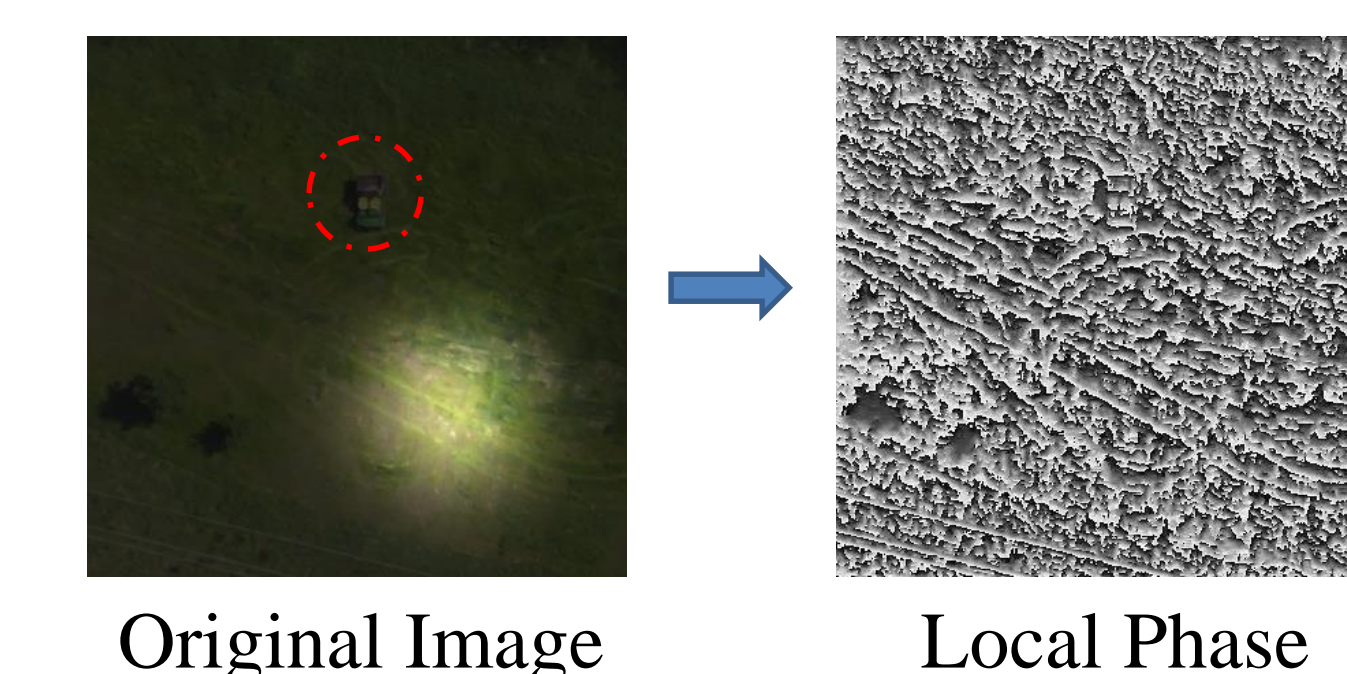

Original Image Local Phase

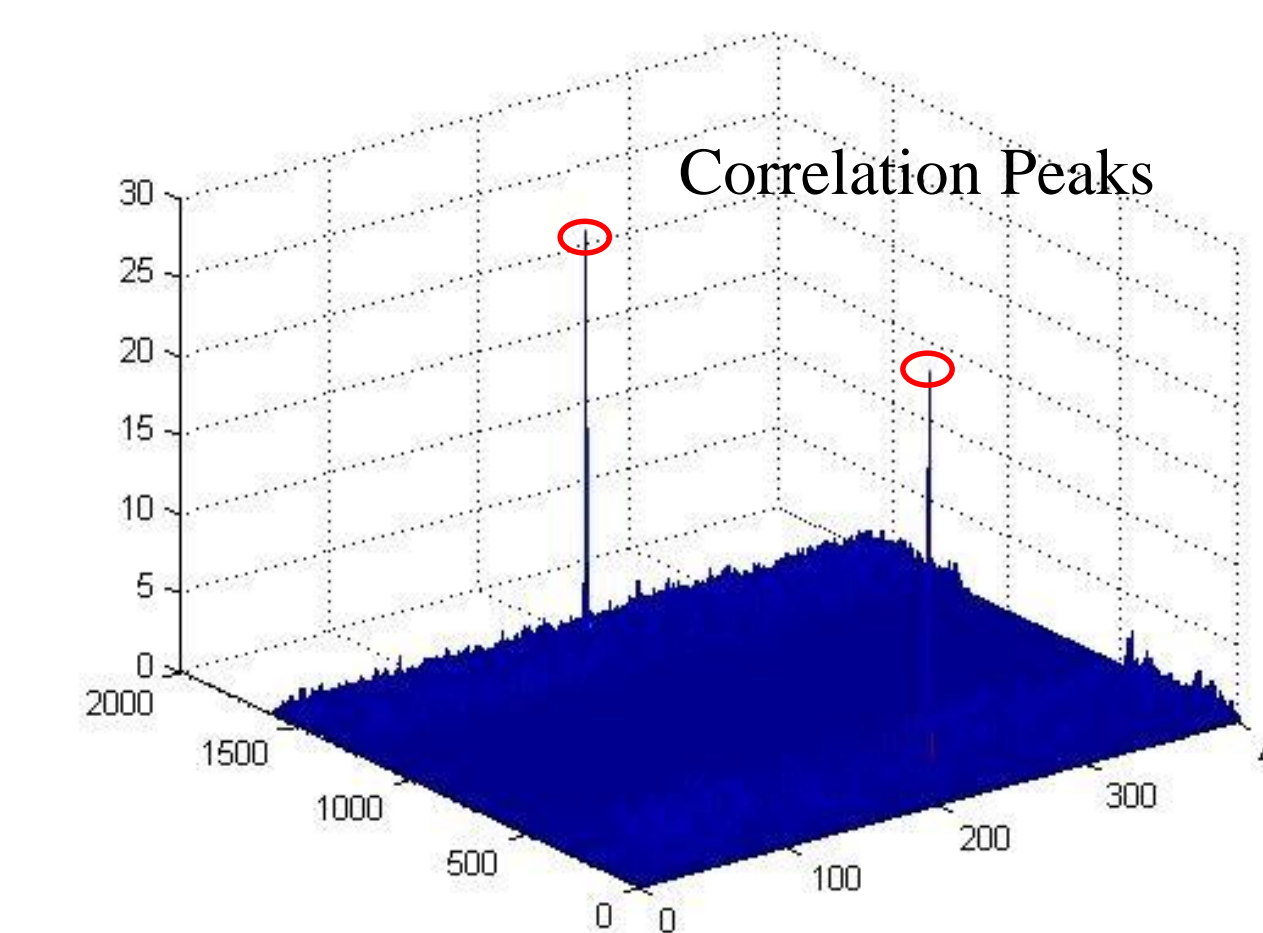


Fig. 9 LP-based FJTC correlation output.



Fig. 10 Detection result in low illumination.

### Conclusion

A robust fringe-adjusted joint transform correlator based on SDF and the monogenic signal is proposed. By utilizing monogenic signal enable us to significantly reduce the effect of background illumination thereby achieving illumination invariance, while the SDF helps to eliminate object distortion such as rotation and scaling. Experimental results show that the proposed technique can be used as a real-time region-of-interest detector in wide-area surveillance for automatic object detection and tracking.